

MJC Flexible Coupling - Jaw - Type

High torque Vibration absorption Electrical Insulation


Couplicon®

Structure

● Set Screw Type → P.xxxx

MJC-*-***** Tight Fit

MJC-*-E***** Easy Fit



● Clamping Type → P.xxxx

MJC-*CS***** Tight Fit

MJC-*CS-E***** Easy Fit



● Set Screw + Key Type → P.xxxx

MJC-*K***** Tight Fit

MJC-*K-E***** Easy Fit



● Clamping + Key Type → P.xxxx

MJC-*CSK***** Tight Fit

MJC-*CSK-E***** Easy Fit



● Material/Finish



	MJC / MJC-CS / MJC-K / MJC-CSK
Hub	A2017 Anodized*1
Sleeve	Polyurethane
Hex Socket Set Screw	SCM435 Ferrosoferric Oxide Film (Black)
Hex Socket Head Cap Screw	SCM435 Ferrosoferric Oxide Film (Black)

*1 : Due to manufacturing process requirements, couplings may have bores and keyways with or without surface treatment. This does not affect the performance of the couplings.

● Sleeve

Outside Diameter: $\phi 14 - \phi 30$



Tight Fit



Easy Fit

Outside Diameter: $\phi 40$



Tight Fit



Easy Fit

Outside Diameter: $\phi 55 - \phi 95$



Tight Fit



Easy Fit

● Part number specification

MJC-30CSK-ERD-10-11

Product Code Size Sleeve Type bore diameter

Please refer to dimensional table for part number specification.

● Applicable motors

	Tight Fit	Easy Fit
Servomotor	○	○
Stepping Motor	○	○
General-Purpose Motor	○	○

○: Excellent ○: Very good

● Property

	Tight Fit	Easy Fit
Zero Backlash	○	—
High Torque	○	○
Allowable Misalignment	○	○
Vibration Absorption	○	○
Electrical Insulation	○	○
Assembling	○	○
Allowable Operating Temperature	-20°C to 60°C	-20°C to 60°C

○: Excellent ○: Very good

● Sleeve Type


Sleeve Type	Sleeve Hardness (JIS)			
	A80	A92	A98	D64
Tight Fit				
Easy Fit				

Small Large
Large Small
Rated Torque / Max. Torque
Allowable Misalignment

● Tight Fit

The hub and sleeve are press-fit and can be used under zero backlash*1. Since the sleeve's vibration absorption can raise the gain of a servomotor, this unit can achieve high responsive operation exceeding the Disk coupling.

*1 : For the torque used under zero backlash, please refer to dimensional table.

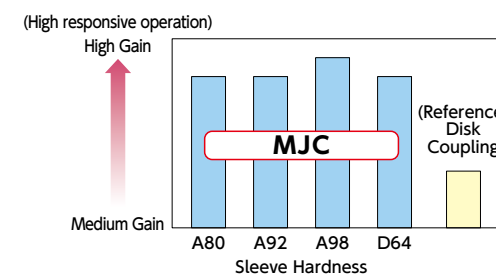

● Tight Fit Applications


XY stage / Index table / Machine tool / Injection molding machine

● This is a jaw type flexible coupling.

- Tight Fit enables transmission with zero backlash at low torque.
- Easy fit allows you to assemble and partition the hub and sleeve smoothly.
- Excellent flexibility allows eccentricity, angular misalignment and twisting vibration to be accepted.
- It has electrical insulation. Resistance value: Not less than 2 MΩ
- There are four types of sleeve hardness. Please select desirable units according to usage conditions including torque and misalignment.

● Easy Fit

This unit allows you to easily assemble and partition the hub and sleeve. This allows you to reduce the time of assembling the unit and maintenance. It is possible to mount a hub on the shaft in advance and easily assemble the unit even in a location where the coupling is less-visible.

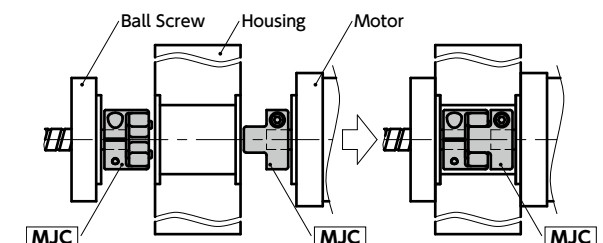

● Easy Fit Applications





Transport device / Mixer / Ventilator / Pump / Dispenser

Additional Keyway at Shaft Hole → P.xxxx	Cleanroom Wash & Packaging → P.xxxx	Change to Stainless Steel Screw → P.xxxx
Available / Add'l charge	Available / Add'l charge	Available / Add'l charge

Selection

● Selection based on shaft diameter and rated torque

The area bounded by the shaft diameter and rated torque indicates the selection size.

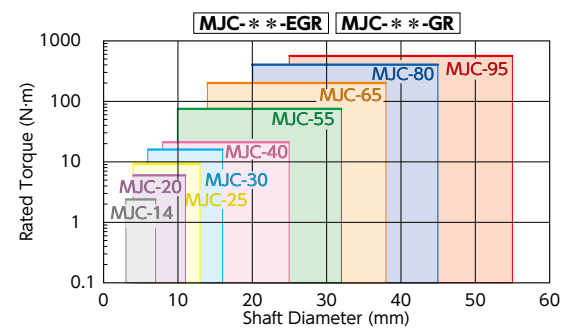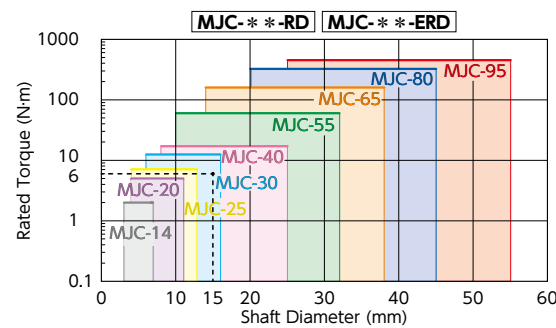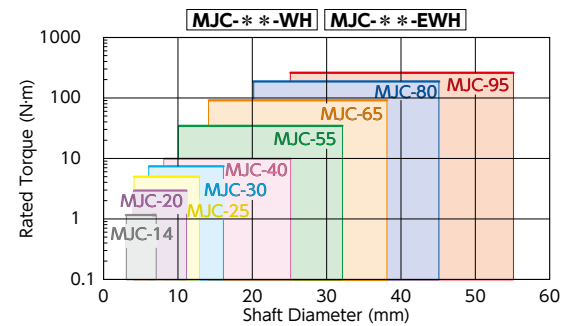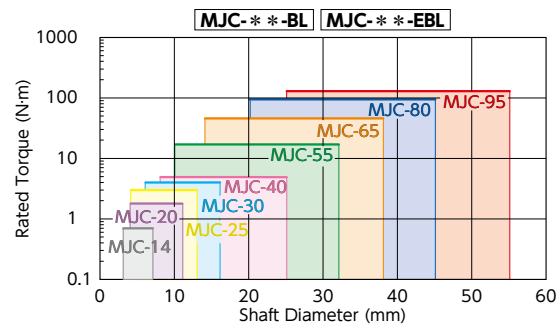

● Selection Example

In case of selected parameters of shaft diameter of $\phi 15$ and load torque of 6 N·m, the selected size for

MJC--RD**, **MJC-**-ERD** is **MJC-30-RD**, **MJC-30-ERD**.

● Selection based on the rated output of the servomotor

Rated Output (W)	Servomotor Specifications			Selection Outside Diameter Size			
	Diameter of Motor Shaft (mm)	Rated Torque (N·m)	Instantaneous Max. Torque (N·m)	MJC-**-BL MJC-**-EBL	MJC-**-WH MJC-**-EWH	MJC-**-RD MJC-**-ERD	MJC-**-GR MJC-**-EGR
10	5 - 6	0.032	0.096	14	14	14	14
20	5 - 6	0.064	0.19	14	14	14	14
30	5 - 7	0.096	0.29	14	14	14	14
50	6 - 8	0.16	0.48	20	20	20	20
100	8	0.32	0.95	20	20	20	20
200	9 - 14	0.64	1.9	30	30	30	30
400	14	1.3	3.8	30	30	30	30
750	16 - 19	2.4	7.2	—	40	40	40

● Motor specifications are based on general values. For details, see the motor manufacturer's catalogs. This is the size for cases where devices such as reduction gears are not used.

● Selection Example






In case of motor specification of shaft diameter of $\phi 14$ and rated torque of 0.64 N·m, the selected size of

MJC--BL** is as follows.

- Set Screw Type — **MJC-30-BL**
- Clamping Type — **MJC-30CS-BL**
- Set Screw + Key Type — **MJC-30K-BL**
- Clamping + Key Type — **MJC-30CSK-BL**


MJC Flexible Coupling - Jaw - Type - Set Screw Type

High torque Vibration absorption Electrical Insulation

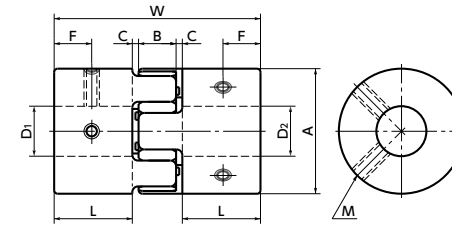
Outside Diameter: $\phi 14 - \phi 30$ Outside Diameter: $\phi 40$ Outside Diameter: $\phi 55 - \phi 95$

Sleeve Details

Tight Fit



Easy Fit



Ambient Temperature / Temperature Correction Factor

Ambient Temperature	Temperature Correction Factor
-20°C to 30°C	1.00
30°C to 40°C	0.80
40°C to 60°C	0.70

Dimensions

Unit : mm

Part Number	A	L	W	B	C*1	Sleeve E	F	M	Screw Tightening Torque (N·m)
MJC-14	14	7	22	6	1	4	3.5	M3	0.7
MJC-20	20	10	30	8	1	6	5	M3	0.7
MJC-25	25	12	34	8	1	8	6	M4	1.7
MJC-30	30	11	35	10	1.5	10	5.5	M4	1.7
MJC-40	40	25	66	12	2	17	12.5	M5	4
MJC-55	55	30	78	14	2	26	15	M6	7
MJC-65	65	35	90	15	2.5	29.5	17.5	M8	15
MJC-80	80	45	114	18	3	35.5	22.5	M8	15
MJC-95	95	50	126	20	3	44	25	M8	15

*1 : Use with C Dimension

Part Number	Standard metric bore diameter (dimensional allowance H8)																																
	D1 • D2 ◀3																																
	3	4	4.5	5	6	6.35	7	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55	
MJC-14	●	●	●	●	●	●	●																										
MJC-20		●	●	●	●	●	●	●		●	●																						
MJC-25		●	●	●	●	●	●	●		●	●	●																					
MJC-30					●	●	●			●	●	●	●	●	●																		
MJC-40								●	●		●	●	●	●	●	●	●	●	●	●	●	●											
MJC-55										●	●	●		●	●	●	●	●	●	●	●	●	●	●	●								
MJC-65													●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		●				
MJC-80																			●	●	●	●	●	●	●	●	●	●	●	●	●		
MJC-95																					●	●	●	●	●	●	●	●	●	●	●	●	

Part Number	Standard inch bore diameter (dimensional allowance H7)																						
	D1 • D2 																						
	1 / 8	3 / 16	1 / 4	5 / 16	3 / 8	7 / 16	1 / 2	9 / 16	5 / 8	11 / 16	3 / 4	13 / 16	7 / 8	15 / 16	1	1 - 1 / 8	1 - 1 / 4	1 - 3 / 8	1 - 1 / 2	1 - 5 / 8	1 - 3 / 4		
MJC-14	●	●	●		●																		
MJC-20		●	●	●	●																		
MJC-25		●	●	●	●	●	●																
MJC-30			●	●	●	●	●	●	●														
MJC-40				●	●	●	●	●	●	●		●											
MJC-55					●	●		●	●	●	●	●	●	●	●								
MJC-65							●	●	●	●	●	●	●	●	●	●		●	●	●			
MJC-80											●	●	●	●	●	●	●	●	●	●	●		
MJC-95															●	●	●	●	●	●	●		

- All products are provided with hex socket set screw.
- In a case where the bore diameter are $\phi 3, \phi 4$ and $\phi 1/8$, the setscrew is used in only one place.
- Recommended dimensional allowances of applicable shaft diameter are h6 and h7.
- A set of hubs with set screw type for one side and clamping type or other type for the other side is available upon request.
- For the shaft insertion amount to the coupling, see Mounting/maintenance.

Additional Keyway at Shaft Hole → P.0000 Cleanroom Wash & Packaging → P.0000 Change to Stainless Steel Screw → P.0000

Available / Add'l charge

Available / Add'l charge


Available / Add'l charge

Performance

Part Number	Sleeve 		Max. Bore Diameter (mm)	Rated*1 torque (N·m)	Max.*1 torque (N·m)	Zero Backlash*3 Allowable Transmission Torque (N·m)	Max. Rotational Frequency (min ⁻¹)	Moment*2 of Inertia (kg·m ²)	Static Torsional Stiffness (N·m / rad)	Max. Lateral Misalignment (mm)	Max. Angular Misalignment (°)	Max. Axial Misalignment (mm)	Mass*2 (g)	Sleeve Hardness (JIS)
	Tight Fit	Easy Fit												
MJC-14	BL	EBL	7	0.7	1.4	0.1	45000	2.0 x 10 ⁻⁷	8	0.15	1	+0.6 0	6.6	A80
MJC-20	BL	EBL	11	1.8	3.6	0.2	31000	1.1 x 10 ⁻⁶	16	0.2	1	+0.8 0	17	
MJC-25	BL	EBL	12.7	3	6	0.4	25000	3.3 x 10 ⁻⁶	32	0.2	1	+0.9 0	34	
MJC-30	BL	EBL	16	4	8	0.5	21000	6.2 x 10 ⁻⁶	46	0.2	1	+1.0 0	44	
MJC-40	BL	EBL	25	4.9	9.8	1.2	15000	3.7 x 10 ⁻⁵	380	0.15	1	+1.2 0	130	
MJC-55	BL	EBL	32	17	34		11000	1.6 x 10 ⁻⁴	1400	0.2	1	+1.4 0	320	
MJC-65	BL	EBL	38.1	46	92		9000	3.6 x 10 ⁻⁴	2800	0.2	1	+1.5 0	520	
MJC-80	BL	EBL	45	95	190		7000	1.1 x 10 ⁻³	3200	0.2	1	+1.8 0	1000	
MJC-95	BL	EBL	55	130	260		6000	2.3 x 10 ⁻³	3600	0.2	1	+2.0 0	1500	
MJC-14	WH	EWL	7	1.2	2.4	0.1	45000	2.0 x 10 ⁻⁷	14	0.1	1	+0.6 0	6.6	A92
MJC-20	WH	EWL	11	3	6	0.2	31000	1.1 x 10 ⁻⁶	29	0.15	1	+0.8 0	17	
MJC-25	WH	EWL	12.7	5	10	0.4	25000	3.3 x 10 ⁻⁶	60	0.15	1	+0.9 0	34	
MJC-30	WH	EWL	16	7.5	15	0.5	21000	6.2 x 10 ⁻⁶	73	0.15	1	+1.0 0	44	
MJC-40	WH	EWL	25	10	20	1.2	15000	3.7 x 10 ⁻⁵	570	0.1	1	+1.2 0	130	
MJC-55	WH	EWL	32	35	70		11000	1.6 x 10 ⁻⁴	1600	0.15	1	+1.4 0	320	
MJC-65	WH	EWL	38.1	95	190		9000	3.6 x 10 ⁻⁴	3000	0.15	1	+1.5 0	520	
MJC-80	WH	EWL	45	190	380		7000	1.1 x 10 ⁻³	5300	0.15	1	+1.8 0	1000	
MJC-95	WH	EWL	55	265	530		6000	2.3 x 10 ⁻³	6200	0.15	1	+2.0 0	1500	
MJC-14	RD	ERD	7	2	4	0.1	45000	2.0 x 10 ⁻⁷	22	0.1	1	+0.6 0	6.6	A98
MJC-20	RD	ERD	11	5	10	0.2	31000	1.1 x 10 ⁻⁶	55	0.1	1	+0.8 0	17	
MJC-25	RD	ERD	12.7	7.2	14.4	0.4	25000	3.3 x 10 ⁻⁶	120	0.1	1	+0.9 0	34	
MJC-30	RD	ERD	16	12.5	25	0.5	21000	6.2 x 10 ⁻⁶	130	0.1	1	+1.0 0	44	
MJC-40	RD	ERD	25	17	34	1.2	15000	3.7 x 10 ⁻⁵	1200	0.1	1	+1.2 0	130	
MJC-55	RD	ERD	32	60	120		11000	1.6 x 10 ⁻⁴	2600	0.1	1	+1.4 0	320	
MJC-65	RD	ERD	38.1	160	320		9000	3.6 x 10 ⁻⁴	4900	0.1	1	+1.5 0	520	
MJC-80	RD	ERD	45	325	650		7000	1.1 x 10 ⁻³	6500	0.1	1	+1.8 0	1000	
MJC-95	RD	ERD	55	450	900		6000	2.3 x 10 ⁻³	8900	0.1	1	+2.0 0	1500	
MJC-14	GR	EGR	7	2.4	4.8	0.1	45000	2.0 x 10 ⁻⁷	66	0.08	1	+0.6 0	6.6	D64
MJC-20	GR	EGR	11	6	12	0.2	31000	1.1 x 10 ⁻⁶	87	0.08	1	+0.8 0	17	
MJC-25	GR	EGR	12.7	9.6	19.2	0.4	25000	3.3x 10 ⁻⁶	160	0.08	1	+0.9 0	34	
MJC-30	GR	EGR	16	16	32	0.5	21000	6.2 x 10 ⁻⁶	200	0.08	1	+1.0 0	44	
MJC-40	GR	EGR	25	21	42	1.2	15000	3.7 x 10 ⁻⁵	3000	0.08	1	+1.2 0	130	
MJC-55	GR	EGR	32	75	150		11000	1.6 x 10 ⁻⁴	9000	0.08	1	+1.4 0	320	
MJC-65	GR	EGR	38.1	200	400		9000	3.6 x 10 ⁻⁴	13000	0.08	1	+1.5 0	520	
MJC-80	GR	EGR	45	405	810		7000	1.1 x 10 ⁻³	14000	0.08	1	+1.8 0	1000	
MJC-95	GR	EGR	55	560	1120		6000	2.3 x 10 ⁻³	15000	0.08	1	+2.0 0	1500	

Technical Information

• Eccentric Reaction Force

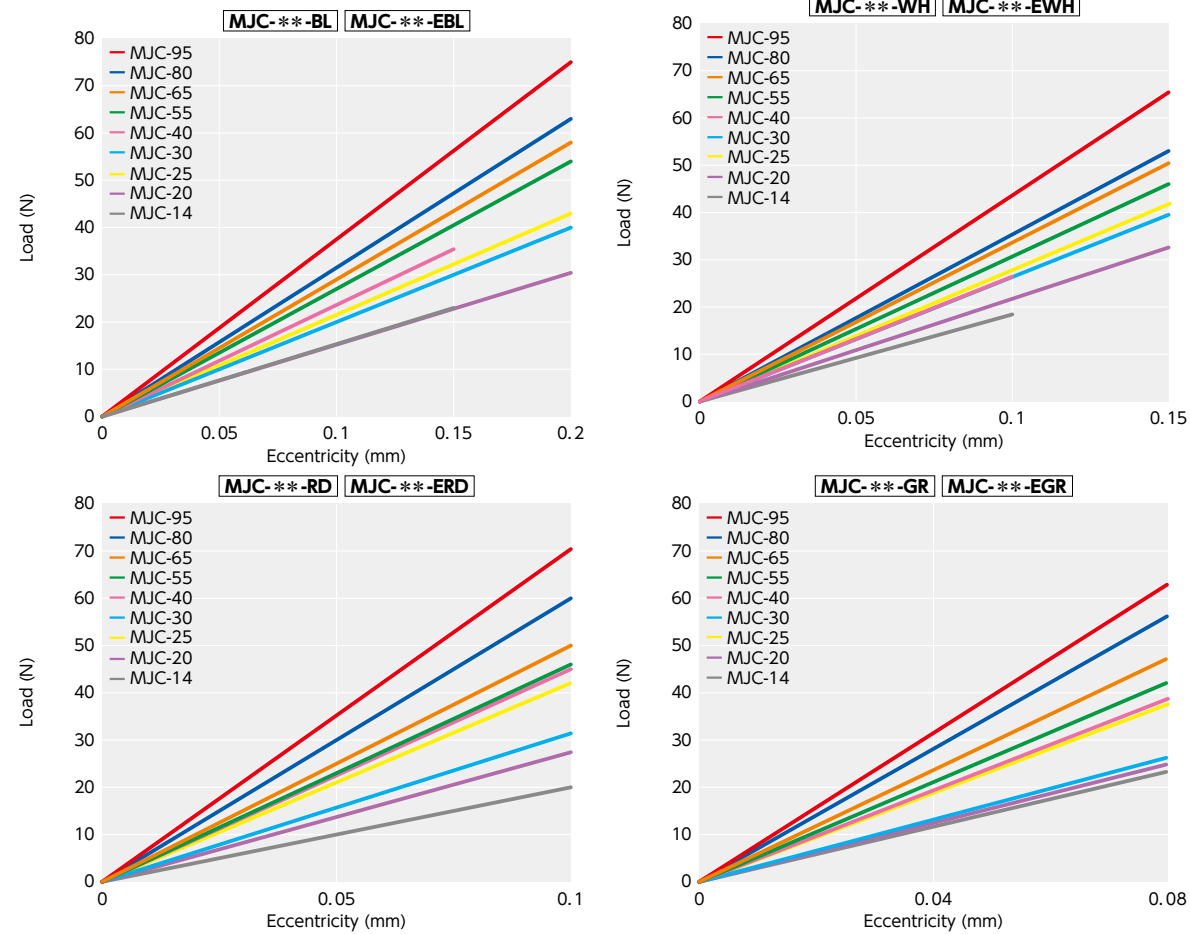

• Slip Torque


For set screw type **MJC**, see Aluminum Alloy Coupling under "Slip Torque of Coupling - Set Screw Type" for details.

Concerning the sizes shown in the table, please note that the shaft's slip torque is smaller than the max. torque of **MJC-CS**.

Part Number	Bore Diameter (mm)																															
	3	4	4.5	5	6	6.35	7	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	55
MJC-14CS	0.8	1.4	1.7	2.1	1.3	1.4	1.5																									
MJC-20CS		3.4	4.1	4.9	6.4	6.9	7.9	9.4	5.1	6	8																					
MJC-25CS		1.7	2.4	3.2	4.8	5.3	6.4	7.9	10	11	8.1	9.4																				
MJC-30CS					4	4.9	6.6	9.3	13	14	17	20	15	21	27																	
MJC-40CS							18	23	24	28	31	38																				
MJC-55CS								29	33	39	46	59	65	72	85	91	98	110	120	130		110	120									
MJC-65CS													100	110	130	160	170	190	220	250	260	310	330	360	180	200						
MJC-80CS																		150	170	180	190	220	240	260	290	320	340	360	500			
MJC-95CS																					340	410	460	500	500	500	500	500	500	500	500	500

• These are test values based on the condition of shaft's dimensional allowance: h7, hardness: from 34 - 40 HRC, and screw tightening torque of the values described in **MJC-CS** dimensional table.

• Change in static torsional stiffness due to temperature

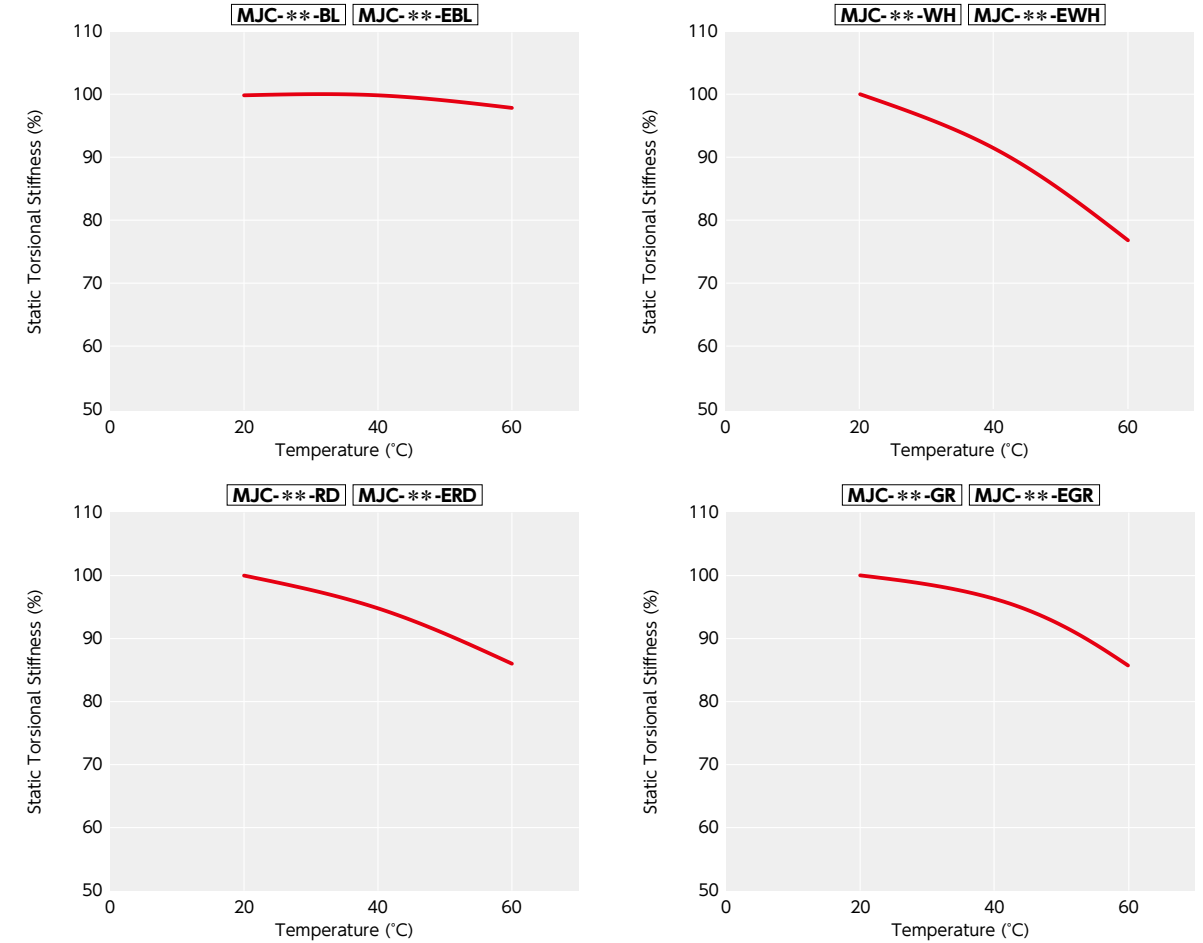

This is a value under the condition where the static torsional stiffness at 20°C is 100%.

The change of torsional stiffness within the range of allowable operating temperature is as shown in the graph. Before using the unit, be aware of the deterioration of responsiveness.

• Slip Torque

Concerning the sizes shown in the table, please note that the shaft's slip torque is smaller than the max. torque of **MJC-CS**.

Unit : N • m																					
Part Number	Bore Diameter (inch)																				
	1/8	3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1	1-1/8	1-1/4	1-3/8	1-1/2	1-5/8	1-3/4
MJC-14CS	0.9	1.9	1.4																		
MJC-20CS		4.5	6.9	9.3	5.1																
MJC-25CS		2.9	5.3	7.8	10	8.2	10														
MJC-30CS			4.9	9.1	13	17	7.5	17	26												
MJC-40CS				17	23	28	34	39													
MJC-55CS					29	40	50	60	71	81	91	100	110	120	130	110	120				
MJC-65CS							85	100	130	150	170	200	220	240	270	310	360	180	200		
MJC-80CS											140	150	170	180	200	230	260	290	320	350	500
MJC-95CS															350	420	500	500	500	500	500

• These are test values based on the condition of shaft's dimensional allowance: h7, hardness: from 34 - 40 HRC, and screw tightening torque of the values described in **MJC-CS** dimensional table.

MJS Flexible Coupling - Jaw - Type (Short)

High torque Vibration absorption Electrical Insulation

Structure

- Clamping Type → P.xxxx
MJS--CS-**-** Tight Fit
MJS--CS-E**-** Easy Fit



- Clamping + Key Type → P.xxxx
MJS--CSK-**-** Tight Fit
MJS--CSK-E**-** Easy Fit



- Sleeve
Outside Diameter: $\phi 20 - \phi 30$



Tight Fit

Easy Fit

Outside Diameter: $\phi 40$



Tight Fit

Easy Fit

Outside Diameter: $\phi 55 / \phi 65$



Tight Fit

Easy Fit

- Material/Finish

	MJS-CS / MJS-CSK
Hub	A2017 Anodized*1
Sleeve	Polyurethane
Hex Socket Head Cap Screw	SCM435 Ferrosoferric Oxide Film (Black)

*1: Due to manufacturing process requirements, couplings may have bores and keyways with or without surface treatment. This does not affect the performance of the couplings.

- Applicable motors

	Tight Fit	Easy Fit
Servomotor	○	●
Stepping Motor	○	○
General-Purpose Motor	○	○

○: Excellent ○: Very good ●: Available

- Property

	Tight Fit	Easy Fit
Zero Backlash	○	—
High Torque	○	○
Allowable Misalignment	○	○
Vibration Absorption	○	○
Electrical Insulation	○	○
Assembling	○	○
Allowable Operating Temperature	−20°C to 60°C	−20°C to 60°C

○: Excellent ○: Very good

- This is a jaw type flexible coupling.
- It is a short type and more compact than **MJC**.
- Tight Fit enables transmission with zero backlash at low torque.
- Easy fit allows assembling and separation of hubs.
- Excellent flexibility allows eccentricity, angular misalignment and twisting vibration to be accepted.
- It has electrical insulation. Resistance value: Not less than 2 MΩ

- Sleeve Type

Sleeve Type	Sleeve Hardness (JIS)			
	A80	A92	A98	D64
Tight Fit	BL	WH	RD	GR
Easy Fit	EBL	EWH	ERD	EGR

Small → Large Rated Torque / Maximum Torque
Large ← Small Allowable Misalignment

- Part number specification

MJS-40CSK-ERD-10-11


Product Code Size Sleeve Type bore diameter

Please refer to dimensional table for part number specification.

- Tight Fit

The hub and sleeve are press-fit and can be used under zero backlash*1. Since the sleeve's vibration absorption can raise the gain of a servomotor, this unit can achieve high responsive operation exceeding the Disk coupling.

*1: For the torque used under zero backlash, please refer to Performance table.

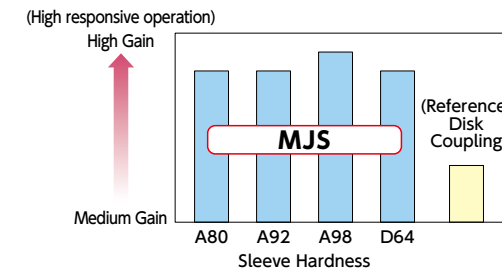

- Tight Fit Applications

XY stage / Index table / Machine tool / Injection molding machine

- Easy Fit

This unit allows you to easily assemble and partition the hub and sleeve. This allows you to reduce the time of assembling the unit and maintenance. It is possible to mount a hub on the shaft in advance and easily assemble the unit even in a location where the coupling is less-visible.

- Easy Fit Applications





Transport device / Mixer / Ventilator / Pump / Dispenser



Selection

- Selection based on shaft diameter and rated torque

The area bounded by the shaft diameter and rated torque indicates is the selection size.

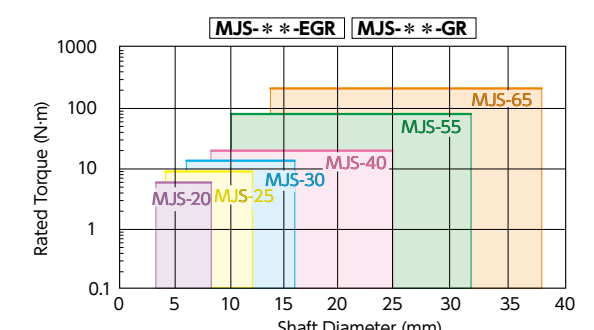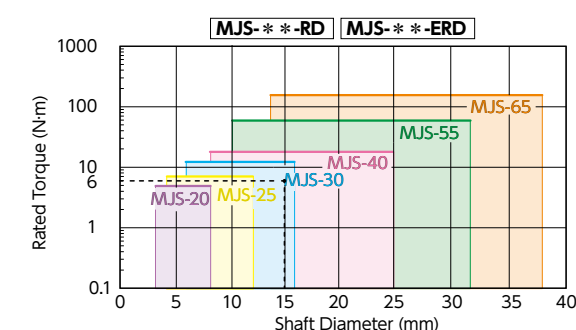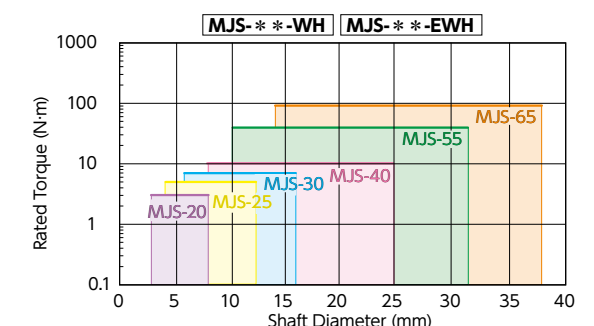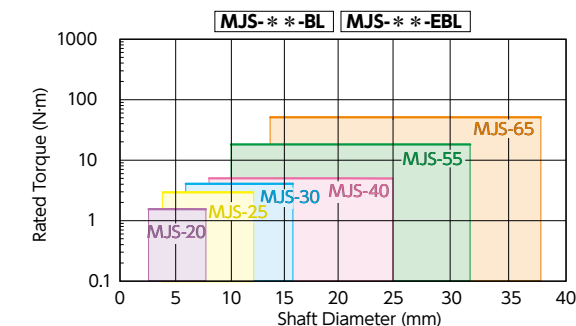

- Selection Example


In case of selected parameters of shaft diameter of $\phi 15$ and load torque of 6 N·m, the selected size for

MJS--CS-RD**, **MJS-**-CS-ERD** is **MJS-30CS-RD**, **MJS-30CS-ERD**.


Additional Keyway at Shaft Hole → P.xxxx Cleanroom Wash & Packaging → P.xxxx Change to Stainless Steel Screw → P.xxxx
Available / Add'l charge Please feel free to contact us Available / Add'l charge

MJS-CS Flexible Coupling - Jaw - Type (Short) - Clamping Type


High torque Vibration absorption Electrical Insulation

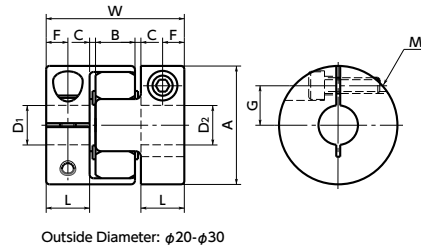

Outside Diameter: φ20-φ30

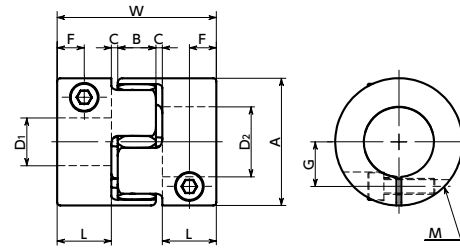


Outside Diameter: φ40

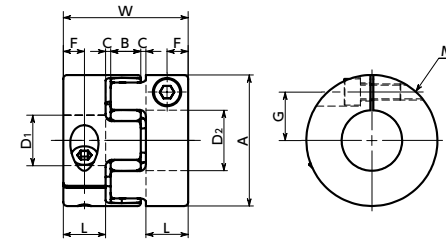


Outside Diameter: φ55 / φ65

Sleeve Details

Tight Fit



Easy Fit



Ambient Temperature / Temperature Correction Factor

Ambient Temperature	Temperature Correction Factor
-20°C to 30°C	1.00
30°C to 40°C	0.80
40°C to 60°C	0.70

Dimensions

Unit : mm

Part Number	Bore Diameter	A	L	W	B	C*1	Sleeve E	F	G	M	Screw Tightening Torque (N·m)
MJS-20CS	3≤D≤8	20	7	24	8	1	6	3.5	6.5	M2.5	1
MJS-25CS	4≤D≤10	25	8	26	8	1	8	4	9	M3	1.5
	10<D≤12								9.5	M2.5	1
MJS-30CS	6≤D≤12	30	9.5	32	10	1.5	10	4.75	10	M4	3.5
	12<D≤16								11	M3	1.5
MJS-40CS	8≤D≤20	40	17	50	12	2	17	8.5	14	M5	8
	20<D≤25								15.75	M4	3.5
MJS-55CS	10≤D≤28	55	18	54	14	2	26	9	20	M6	13
	28<D≤32								21	M5	8
MJS-65CS	14≤D≤32	65	21	62	15	2.5	29.5	10.5	24	M8	28
	32<D≤38								25	M6	13

*1 : Use with C Dimension

Part Number	Standard Bore Diameter D1・D2 3																											
	3	4	4.5	5	6	6.35	7	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	28	30	32	35	38		
MJS-20CS	●	●	●	●	●	●	●	●																				
MJS-25CS		●	●	●	●	●	●	●	●	●	●	●																
MJS-30CS					●	●	●	●	●	●	●	●	●	●	●													
MJS-40CS								●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
MJS-55CS											●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
MJS-65CS												●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

- All products are provided with hex socket head cap screw.
- Recommended dimensional allowances of applicable shaft diameter are h6 and h7.
- A set of hubs with clamping type for one side and clamping + key type for the other side is available upon request.
- In case of mounting on D-cut shaft, be careful about the position of the D-cut surface of the shaft.
- For the shaft insertion amount to the coupling, see Mounting/maintenance.

Performance

Part Number	Sleeve	Tight Fit	Easy Fit	Max. Bore Diameter (mm)	Rated*1 torque (N·m)	Max.*1 torque (N·m)	Zero Backlash*3 Allowable Transmission Torque (N·m)	Max. Rotational Frequency (min ⁻¹)	Moment*2 of Inertia (kg·m ²)	Static Torsional Stiffness (N·m / rad)	Max. Lateral Misalignment (mm)	Max. Angular Misalignment (°)	Max. Axial Misalignment (mm)	Mass*2 (g)	Sleeve Hardness (JIS)
MJS-20CS	BL	EBL		8	1.8	3.6	0.2	31000	8.4x 10 ⁻⁷	16	0.2	1	+0.8 0	15	A80
MJS-25CS	BL	EBL		12	3	6	0.4	25000	2.6 x 10 ⁻⁶	32	0.2	1	+0.9 0	26	
MJS-30CS	BL	EBL		16	4	8	0.5	21000	5.5 x 10 ⁻⁶	46	0.2	1	+1.0 0	39	
MJS-40CS	BL	EBL		25	4.9	9.8	1.2	15000	2.7 x 10 ⁻⁵	380	0.15	1	+1.2 0	100	
MJS-55CS	BL	EBL		32	17	34		11000	1.1 x 10 ⁻⁴	1400	0.2	1	+1.4 0	210	
MJS-65CS	BL	EBL		38	46	92		9000	2.4 x 10 ⁻⁴	2800	0.2	1	+1.5 0	340	A92
MJS-20CS	WH	EWL		8	3	6	0.2	31000	8.4x 10 ⁻⁷	29	0.15	1	+0.8 0	15	
MJS-25CS	WH	EWL		12	5	10	0.4	25000	2.6 x 10 ⁻⁶	60	0.15	1	+0.9 0	26	
MJS-30CS	WH	EWL		16	7.5	15	0.5	21000	5.5 x 10 ⁻⁶	73	0.15	1	+1.0 0	39	
MJS-40CS	WH	EWL		25	10	20	1.2	15000	2.7 x 10 ⁻⁵	570	0.1	1	+1.2 0	100	
MJS-55CS	WH	EWL		32	35	70		11000	1.1 x 10 ⁻⁴	1600	0.15	1	+1.4 0	210	A98
MJS-65CS	WH	EWL		38	95	190		9000	2.4 x 10 ⁻⁴	3000	0.15	1	+1.5 0	340	
MJS-20CS	RD	ERD		8	5	10	0.2	31000	8.4x 10 ⁻⁷	55	0.1	1	+0.8 0	15	
MJS-25CS	RD	ERD		12	7.2	14.4	0.4	25000	2.6 x 10 ⁻⁶	120	0.1	1	+0.9 0	26	
MJS-30CS	RD	ERD		16	12.5	25	0.5	21000	5.5 x 10 ⁻⁶	130	0.1	1	+1.0 0	39	
MJS-40CS	RD	ERD		25	17	34	1.2	15000	2.7 x 10 ⁻⁵	1200	0.1	1	+1.2 0	100	D64
MJS-55CS	RD	ERD		32	60	120		11000	1.1 x 10 ⁻⁴	2600	0.1	1	+1.4 0	210	
MJS-65CS	RD	ERD		38	160	320		9000	2.4 x 10 ⁻⁴	4900	0.1	1	+1.5 0	340	
MJS-20CS	GR	EGR		8	6	12	0.2	31000	8.4x 10 ⁻⁷	87	0.08	1	+0.8 0	15	
MJS-25CS	GR	EGR		12	9.6	19.2	0.4	25000	2.6 x 10 ⁻⁶	160	0.08	1	+0.9 0	26	
MJS-30CS	GR	EGR		16	16	32	0.5	21000	5.5 x 10 ⁻⁶	200	0.08	1	+1.0 0	39	D64
MJS-40CS	GR	EGR		25	21	42	1.2	15000	2.7 x 10 ⁻⁵	3000	0.08	1	+1.2 0	100	
MJS-55CS	GR	EGR		32	75	150		11000	1.1 x 10 ⁻⁴	9000	0.08	1	+1.4 0	210	
MJS-65CS	GR	EGR		38	200	400		9000	2.4 x 10 ⁻⁴	13000	0.08	1	+1.5 0	340	


*1 : Correction of rated torque and max. torque due to load fluctuation is not required. However, if ambient temperature exceeds 30°C, be sure to correct the rated torque and max. torque with temperature correction factor shown in the table. **MJS-CS**'s allowable operating temperature is -20°C to 60°C.

*2 : These are values with max. bore diameter.

*3 : For transmission with Zero Backlash, please use a tight fit sleeve.

Part number specification


MJS-55CS-EGR-14-16




Additional Keyway at Shaft Hole → P.0000 Cleanroom Wash & Packaging → P.0000 Change to Stainless Steel Screw → P.0000
Available / Add'l charge Please feel free to contact us Available / Add'l charge

Technical Information

• Eccentric Reaction Force

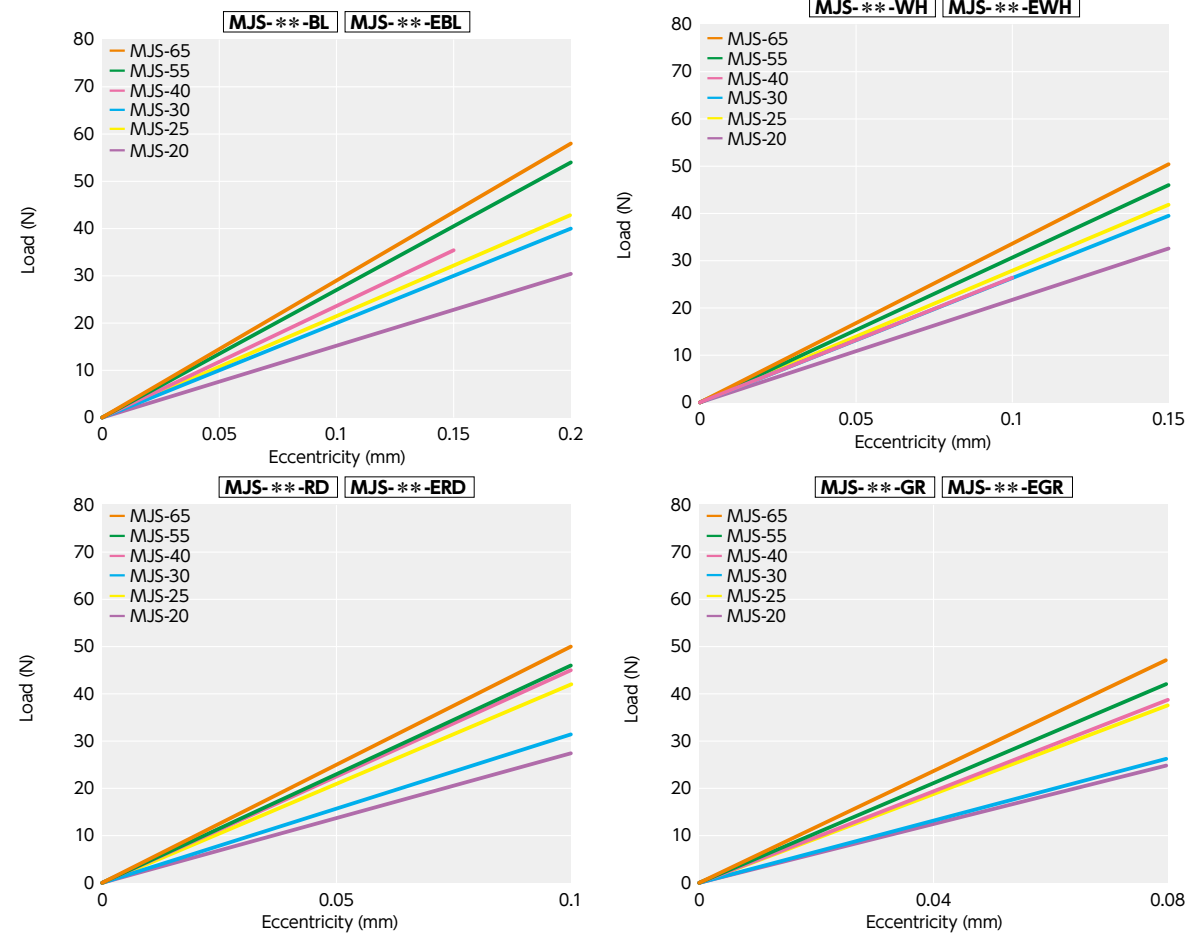

• Change in static torsional stiffness due to temperature

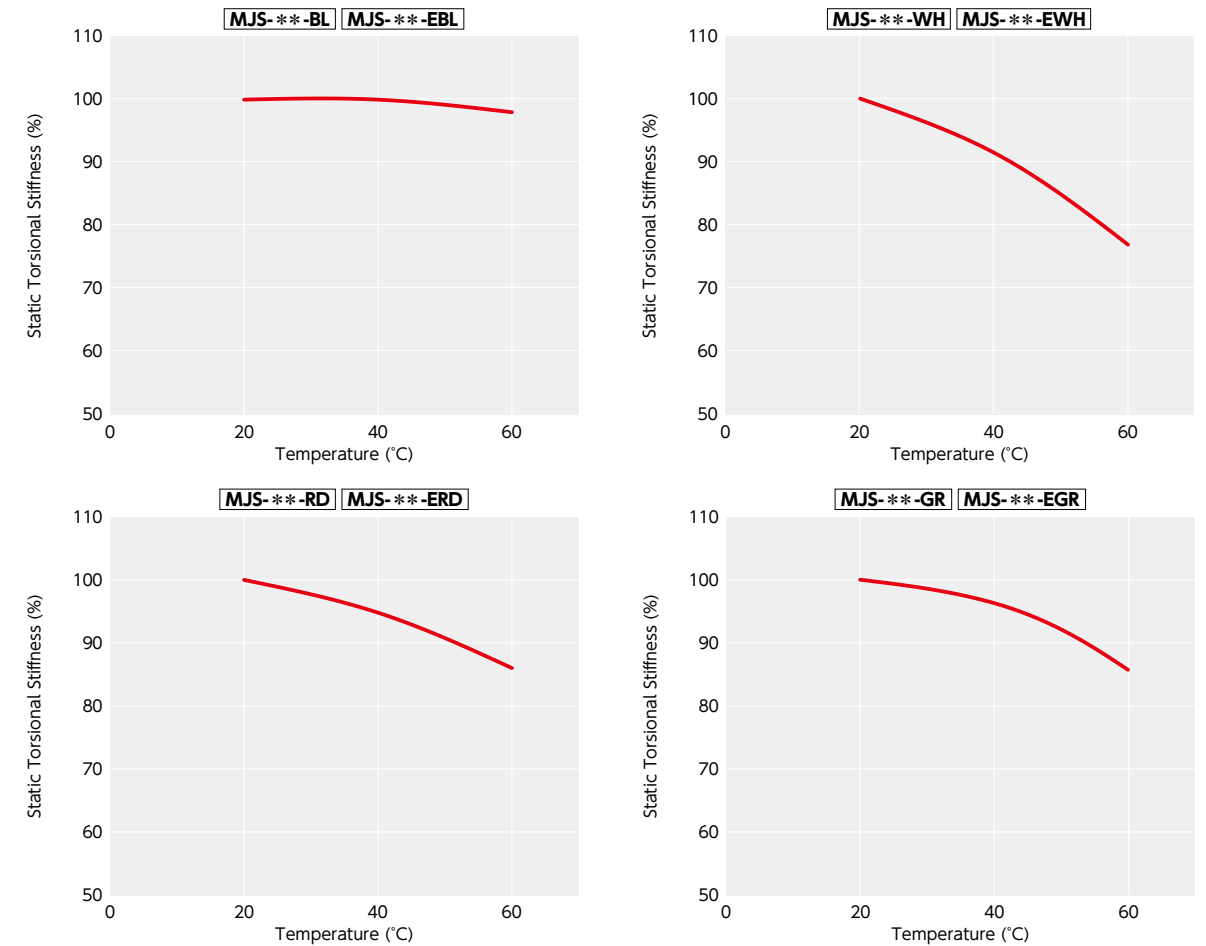

This is a value under the condition where the static torsional stiffness at 20°C is 100%.

The change of torsional stiffness within the range of allowable operating temperature is as shown in the graph. Before using the unit, be aware of the deterioration of responsiveness.

• Slip Torque

As in the table below, the clamping type **MJS-CS** has different slip torque according to the bore diameter.

Take care during selection.

Take care during selection.																												Unit : N · m			
Part Number	Bore Diameter (mm)																														
	3	4	4.5	5	6	6.35	7	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	28	30	32	35	38					
MJS-20CS	0.8	1.7	2.2	2.6	3.5	3.8	4.4	5.3																							
MJS-25CS		1.9	2.6	3.4	4.9	5.4	6.4	7.9	10	11	8.6	8.9																			
MJS-30CS					7	7.6	8.7	10	13	14	16	17	14	16	17																
MJS-40CS								28	35	37																					
MJS-55CS										40	46	53	66	72	79	92	98	100	110	130	130		140								
MJS-65CS													110	120	130	150	160	170	190	210	220	260	280	300	300	300					

• These are test values based on the conditions of shaft dimensional allowance: h7, hardness: 34 - 40 HRC, and screw tightening torque of the values described in **MJS-CS** dimension tables. They are not guaranteed values.

• Slip torque changes with usage conditions. Carry out tests under conditions similar to actual conditions in advance.


MJB Flexible Couplings - Jaw Type (Bushing)

High torque Vibration absorption Electrical Insulation

Structure

- Bushing Type

MJB → P.xxxx

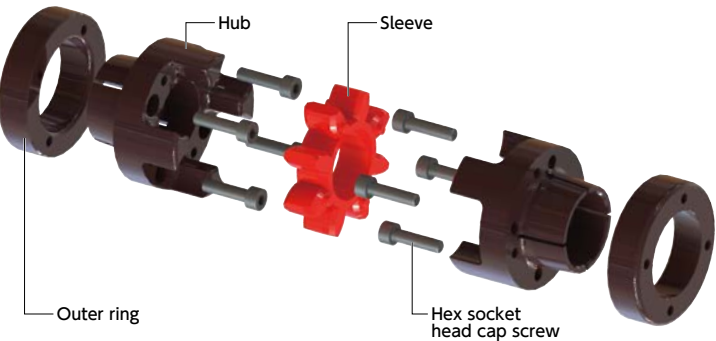

Material/Finish



	MJB
Hub	S45C Ferrosoferric Oxide Film (Black)*1
Outer Ring	S45C Ferrosoferric Oxide Film (Black)
Sleeve	Polyurethane
Hex Socket Head Cap Screw	SCM435 Ferrosoferric Oxide Film (Black)

*1 : Due to manufacturing process requirements, couplings may have bores with or without surface treatment. This does not affect the performance of the couplings.

Part number specification

MJB-55-RD - 10 - 10

Product Code Size Sleeve Type Bore Diameter

Please refer to dimensional table for part number specification.

Additional Keyway at Shaft Hole → P.xxxx	Cleanroom Wash & Packaging → P.xxxx	Change to Stainless Steel Screw → P.xxxx
Not Available	Not Available	Not Available

Applicable motors

	Tight Fit	Easy Fit
Servomotor	○	●
Stepping Motor	○	○
General-purpose Motor	◎	◎

◎: Excellent ○: Very good ●: Available

Property

	Tight Fit	Easy Fit
High Torque	◎	◎
Allowable Misalignment	○	○
Vibration Absorption	◎	◎
Electrical Insulation	◎	◎
Assembling	○	◎
Allowable Operating Temperature	-20°C to 60°C	-20°C to 60°C

◎: Excellent ○: Very good

- This is a jaw type flexible coupling.
- Excellent for high torque transmission and ideal for machine tool spindles.
- Excellent flexibility. Excellent flexibility allows eccentricity, angular misalignment and twisting vibration to be accepted.
- It has electrical insulation. Resistance value: Not less than 2 MΩ
- There are four types of sleeve hardness. Please select desirable units according to usage conditions including torque and misalignment.
- Since the sleeve's vibration absorption of Tight Fit can raise the gain of a servomotor, this unit can achieve high responsive operation exceeding the Disk coupling.
- Easy fit allows you to assemble and partition the hub and sleeve smoothly.
This allows you to reduce the time of assembling the unit and maintenance.

Application

Machine tool / Spindle

Sleeve Type

Sleeve type	Sleeve hardness (JIS)			
	A80	A92	A98	D64
Tight fit				
Easy fit				

Small → Large
Rated torque / Max. torque
Allowable misalignment
Large ← Small







MJB Flexible Couplings - Jaw Type (Bushing)

High torque Vibration absorption Electrical Insulation

Selection

Selection Based on Shaft Diameter and Rated Torque

The area bounded by the shaft diameter and rated torque indicates the selection size.

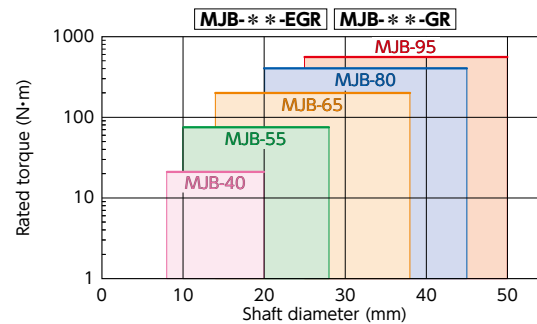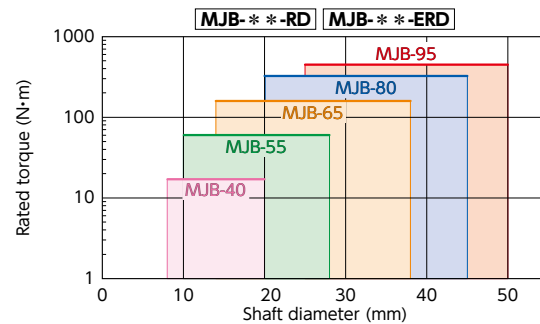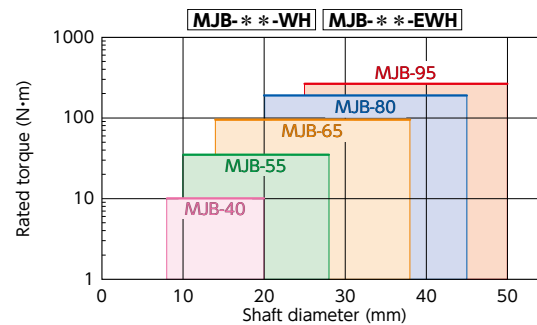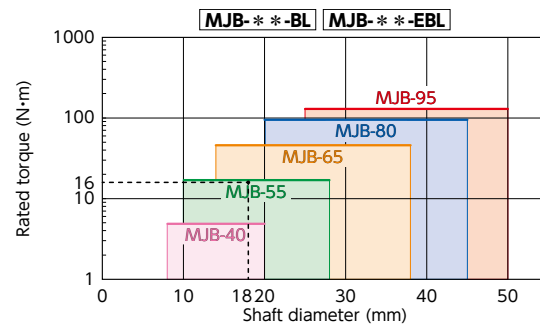


Selection Example

In case of selected parameters of shaft diameter of ϕ 18 and load torque of 16 N·m, the selection size for MJB-**-BL MJB-**-EBL is MJB-55-BL MJB-55-EBL

Mounting and Removing


Mounting

- ① Clean up the fitting surfaces of hub, outer ring and shaft.
- ② Apply light oil thinly on the surfaces. However, avoid molybdenum base oil as it seriously reduces the fastening power.
- ③ Insert the shaft to the dimension L. → **Table 1**

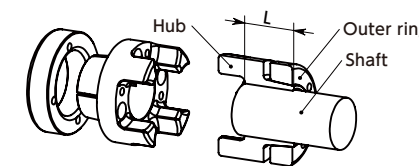


- ④ Tighten the hex socket head bolts with 50% of the tightening torque in **Table 1**, each once, following the sequence in **Fig. 1**.
- ⑤ In the same sequence as in ④, tighten the hex socket head bolts with 100% of the tightening torque in **Table 1**, each once.

Diagram 1 Tighten in diagonal sequence

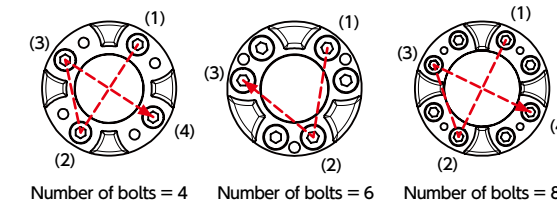

- ⑥ Tighten all hex socket head cap screws with 100% of the tightening torque in **Table 1**, following the sequence in **Fig. 2**.

Diagram 2 Tighten all bolts

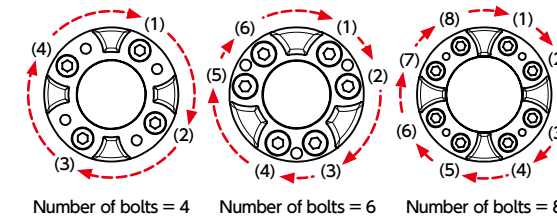


- ⑦ Repeat ⑥ until all hex socket head cap screws are securely fixed.

As a guide, the rotation of a hex socket head screw, when tightened, should be less than 20 degrees.


Use a torque wrench to tighten bolts.

Removal


- ① Disassemble the hub and the sleeve.

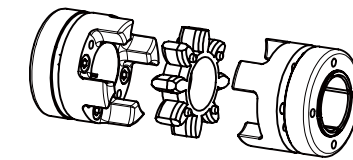

- ② Confirm that there is no torque or thrust load, then loosen all hex socket head bolts completely and remove them.



- ③ Insert one of the removed bolts in ② to a forcing tap, and tighten little by little, avoiding uneven clamping.

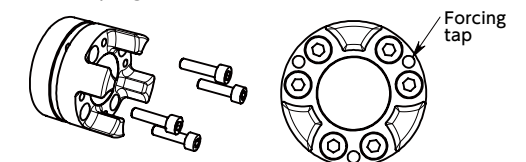

- ④ Repeating ③ will lead to sharply reduced tightening torque.

Remove the coupling from the shaft, as the fastening force from the tapered surface is reduced.





Table 1

Part Number	L	Hex Socket Head Cap Screw		Screw Tightening Torque (N·m)
		Diameter of Thread	Number of Bolts	
MJB-40	25	M4	6	4
MJB-55	30	M5	4	8.5
MJB-65	35	M5	8	8.5
MJB-80	45	M6	8	14
MJB-95	50	M8	8	35

MJB Flexible Couplings - Jaw Type (Bushing)

High torque Vibration absorption Electrical Insulation

MJB

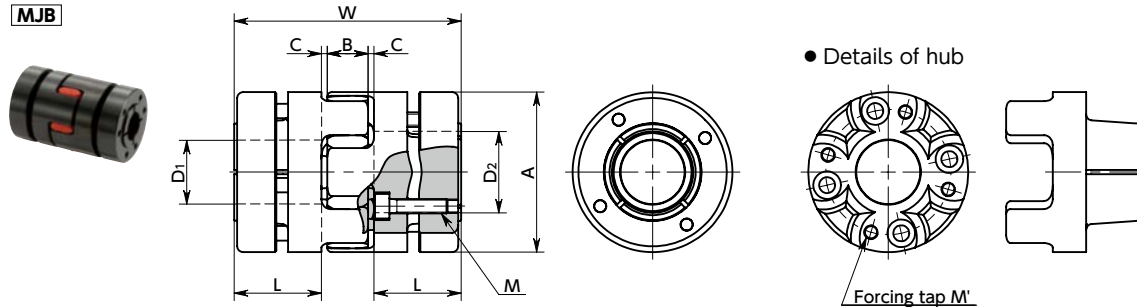

Dimensions

Unit : mm

Part Number	A	L	W	B	C*1	Sleeve E	M	Number of Bolts	Forcing Tap M'	Screw Tightening Torque (N·m)
MJB-40	40	25	66	12	2	17	M4	6	M4	4
MJB-55	55	30	78	14	2	26	M5	4	M5	8.5
MJB-65	65	35	90	15	2.5	29.5	M5	8	M5	8.5
MJB-80	80	45	114	18	3	35.5	M6	8	M6	14
MJB-95	95	50	126	20	3	44	M8	8	M8	35

*1 : Use with C Dimension


Part Number	Standard Bore Diameter																								
	D1	D2																							
	8	9.525	10	11	12	14	15	16	18	19	20	22	24	25	28	30	32	35	38	40	42	45	48	50	
MJB-40	●	●	●	●	●	●	●	●	●	●	●														
MJB-55			●	●	●	●	●	●	●	●	●	●	●	●	●										
MJB-65						●	●	●	●	●	●	●	●	●	●	●	●	●	●						
MJB-80											●	●	●	●	●	●	●	●	●	●	●	●			
MJB-95														●	●	●	●	●	●	●	●	●	●	●	

- All products are provided with hex socket head cap screw.
- Recommended tolerance for shaft diameters is h6 and h7.
- For the shaft insertion amount to the coupling, see Mounting/maintenance.

Sleeve Details

Tight fit

Easy fit

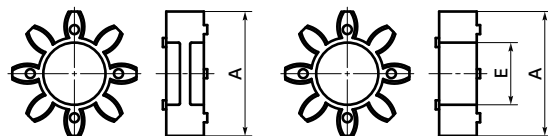

Performance

Part Number	Sleeve Tight Fit	Sleeve Easy Fit	Max. Bore Diameter (mm)	Rated Torque *1 (N·m)	Max. *1 Torque (N·m)	Max. Rotational Frequency (min ⁻¹)	Moment *2 of Inertia (kg·m ²)	Static Torsional Stiffness (N·m / rad)	Max. Lateral Misalignment (mm)	Max. Angular Misalignment (°)	Max. Axial Misalignment (mm)	Mass *2 (g)	Sleeve Hardness (JIS)
MJB-40	BL	EBL	20	4.9	9.8	23000	8.6 x 10 ⁻⁵	380	0.15	1	0 - +1.2	400	A80
MJB-55	BL	EBL	28	17	34	17000	3.7 x 10 ⁻⁴	1400	0.2	1	0 - +1.4	800	
MJB-65	BL	EBL	38	46	92	14000	8.0 x 10 ⁻⁴	2800	0.2	1	0 - +1.5	1100	
MJB-80	BL	EBL	45	95	190	11000	2.5 x 10 ⁻³	3200	0.2	1	0 - +1.8	2300	
MJB-95	BL	EBL	50	130	260	10000	5.4 x 10 ⁻³	3600	0.2	1	0 - +2.0	4000	A92
MJB-40	WH	EWL	20	10	20	23000	8.6 x 10 ⁻⁵	570	0.1	1	0 - +1.2	400	
MJB-55	WH	EWL	28	35	70	17000	3.7 x 10 ⁻⁴	1600	0.15	1	0 - +1.4	800	
MJB-65	WH	EWL	38	95	190	14000	8.0 x 10 ⁻⁴	3000	0.15	1	0 - +1.5	1100	
MJB-80	WH	EWL	45	190	380	11000	2.5 x 10 ⁻³	5300	0.15	1	0 - +1.8	2300	
MJB-95	WH	EWL	50	265	530	10000	5.4 x 10 ⁻³	6200	0.15	1	0 - +2.0	4000	A98
MJB-40	RD	ERD	20	17	34	23000	8.6 x 10 ⁻⁵	1200	0.1	1	0 - +1.2	400	
MJB-55	RD	ERD	28	60	120	17000	3.7 x 10 ⁻⁴	2600	0.1	1	0 - +1.4	800	
MJB-65	RD	ERD	38	160	320	14000	8.0 x 10 ⁻⁴	4900	0.1	1	0 - +1.5	1100	
MJB-80	RD	ERD	45	325	650	11000	2.5 x 10 ⁻³	6500	0.1	1	0 - +1.8	2300	
MJB-95	RD	ERD	50	450	900	10000	5.4 x 10 ⁻³	8900	0.1	1	0 - +2.0	4000	D64
MJB-40	GR	EGR	20	21	42	23000	8.6 x 10 ⁻⁵	3000	0.08	1	0 - +1.2	400	
MJB-55	GR	EGR	28	75	150	17000	3.7 x 10 ⁻⁴	9000	0.08	1	0 - +1.4	800	
MJB-65	GR	EGR	38	200	400	14000	8.0 x 10 ⁻⁴	13000	0.08	1	0 - +1.5	1100	
MJB-80	GR	EGR	45	405	810	11000	2.5 x 10 ⁻³	14000	0.08	1	0 - +1.8	2300	
MJB-95	GR	EGR	50	560	1120	10000	5.4 x 10 ⁻³	15000	0.08	1	0 - +2.0	4000	

*1 : Correction of rated torque and max. torque due to load fluctuation is not required. However, if ambient temperature exceeds 30°C, be sure to correct the rated torque and max. torque with temperature correction factor shown in the following table. The allowable operating temperature of MJB is -20°C to 60°C.

※ The shaft's slip torque may be smaller than the coupling's rated torque depending on the shaft bore. → P.xxxx

*2 : These are values with max. bore diameter.

Ambient Temperature / Temperature Correction Factor

Ambient Temperature	Temperature Correction Factor
-20°C to 30°C	1.00
30°C to 40°C	0.80
40°C to 60°C	0.70

Part number specification

MJB-65-EWH-16-20 1 Set

MJ-40 - RD-SLV Single Sleeve

Sleeve Symbol Outside Diameter (Dimension A) Sleeve Symbol


Additional Keyway at Shaft Hole → P.xxxx Not Available

Cleanroom Wash & Packaging → P.xxxx Not Available


Change to Stainless Steel Screw → P.xxxx Not Available

Technical Information

Eccentric Reaction Force

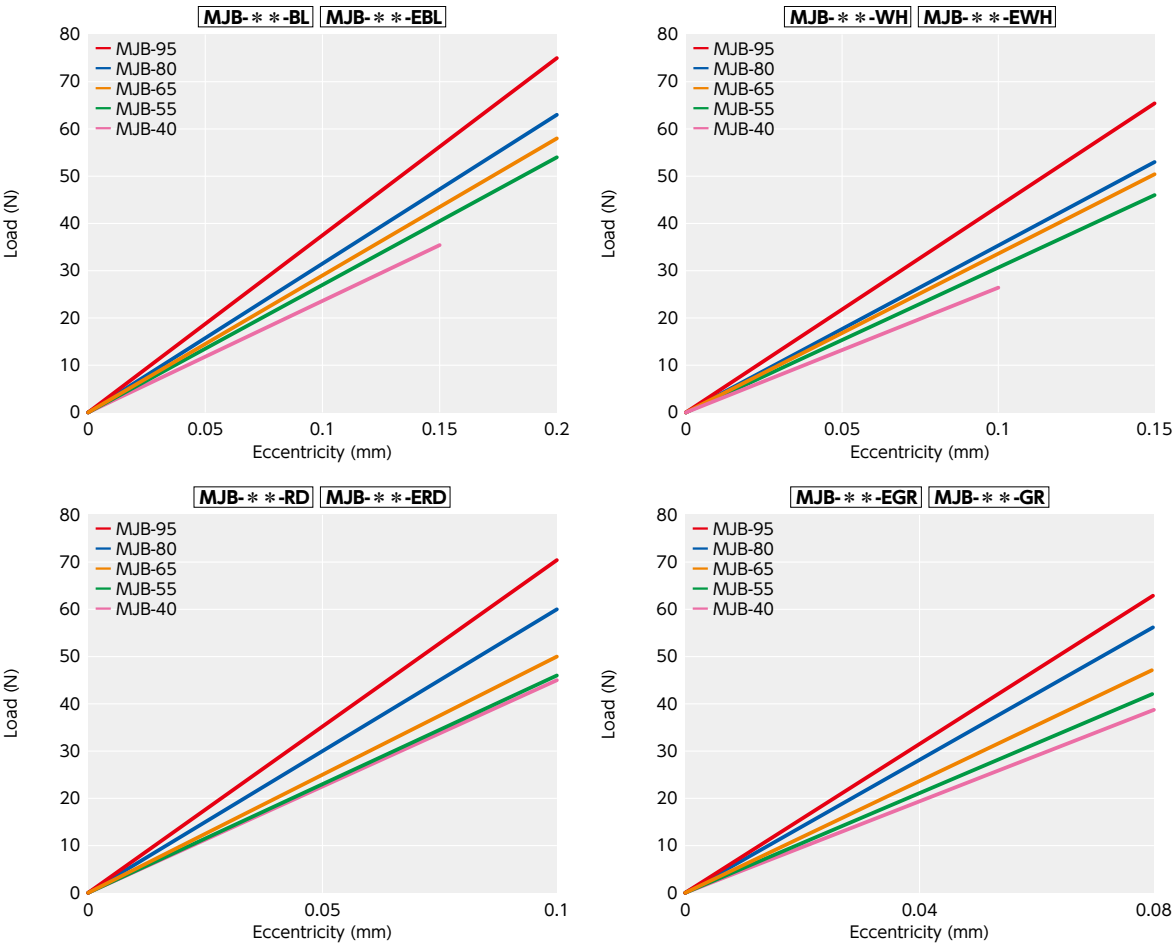

Change in static torsional stiffness due to temperature

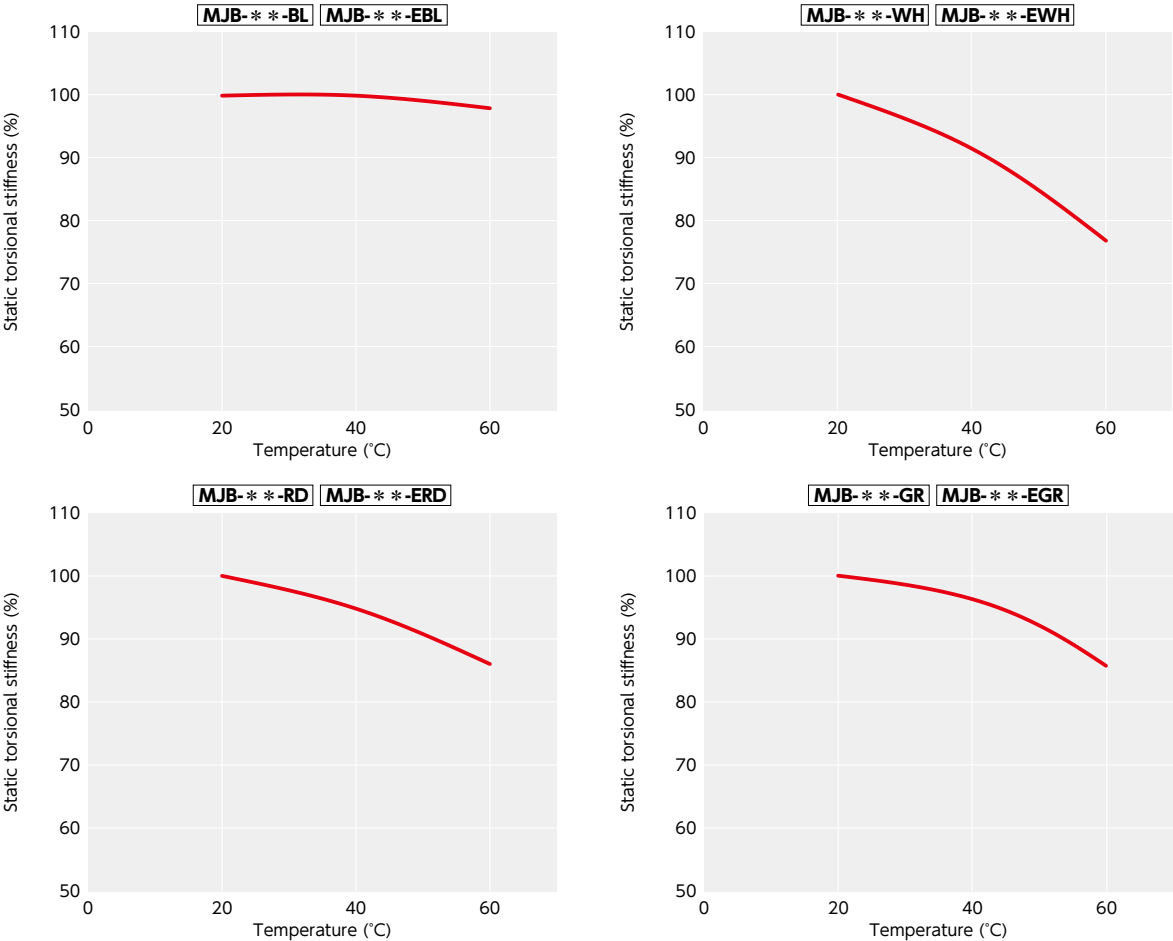

This is a value under the condition where the static torsional stiffness at 20°C is 100%. Changes in the static torsion spring constant within the operating temperature are shown in the graph. Before using the unit, be aware of the deterioration of responsiveness.

Slip Torque

As in the table below, the bushing type **MJB** has different slip torque according to the bore diameter. Take care during selection.

Part Number	Bore Diameter (mm)																				Unit : N・m	
	10	11	12	14	15	16	18	19	20	22	24	25	28	30	32	35	38	40	42	45		
MJB-55	32	54	75	110	130																	
MJB-65				160	170	180	200	210	220	240	260	270	300	320	340	370						
MJB-80									280	330	380	410	480	500	500	500	500	500	500	500		
MJB-95												500	500	500	500	500	500	500	500	500	500	500

- These are test values based on the conditions of shaft dimensional allowance: h7, hardness: 34 - 40 HRC, and screw tightening torque of the values described in **MJB** dimension tables. They are not guaranteed values.
- Slip torque changes with usage conditions. Carry out tests under conditions similar to actual conditions in advance.